


LONG LIFE MASTERSEAL - IP54

60,000 hour long life inductive low bay with instant restrike



Low bay fitting for installation in hostile and wet environments, sealed to IP54.

Quick and simple to install, easy access with removable gear tray. The low bay comes with a wide option of control gear and a full range of easy to fit accessories. Available in tungsten halogen auxiliary versions. High rack reflector models also available.

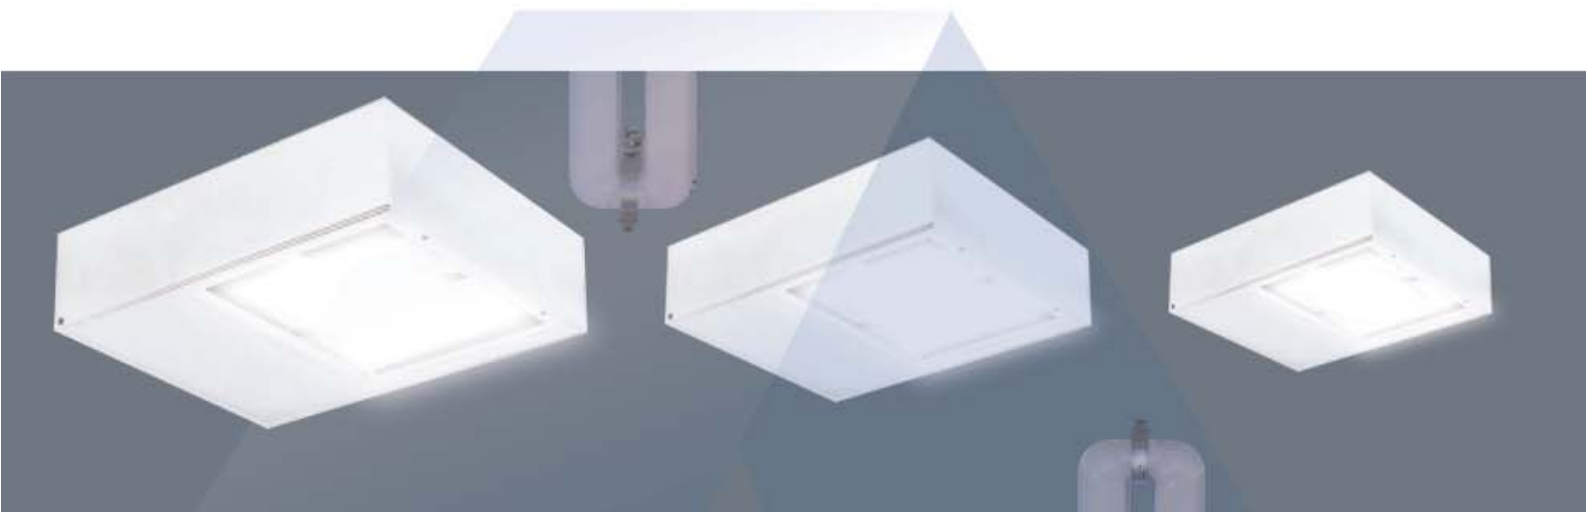

SEALED UNIT - LOW BAYS IP54

product description

endura 100w / 8000 lumen
endura 100w / 11000 lumen
100w lamp / 150w gear

part no.

LLM100/8
LLM100/11

ACCESSORIES

product description

steel wire guard
toughened bs glass visor

part no.

swg
tgv

TECHNICAL SPECIFICATIONS

ratings: IP54
housing & frame: zinc steel
diffusers: standard glass
reflectors: anodised polished aluminium
control gear: osram qt endura 100 - 150

supply: slide in gear tray
standards: compliance with en 60598

product pictographs

